



PUMPS & ACCESSORIES





Pneumatic Diaphragm Pump



For Purchase or Rent

1-1/2" Pro Series Metallic Double Diaphragm Pump

#666159-362-C

Inlet/Outlet Size	1-1/2"
Flow Rate	90 gpm
Max Temp	150° F
Max Suspended Solid Sizes	3/32"
Max Operating Pressure	120 psi
Max Solid Diameter	1/4"
Air Inlet	1/2" FNPT
Manifold Connection	Single
Self Priming	Dry: 10 ft Wet: 15 ft
Valve Type	Ball

ARO



Blue PVC Discharge Hose, Male and Female NPSH Threaded Couplings, 2" x 50 ft



Thermoid AIR POWER™ Jackhammer Air Hose, 3/4" x 5 ft

Engine Powered Pumps

For Purchase or Rent



2" Engine Powered Trash Pump

#EPT3-50HA

Max Capacity	190 gpm
Max Head	90 ft
Impeller Material	High Chrome Iron Casting
Wear Plate Material	Stainless Steel
Discharge Connection	2" NPT Coupling
Suction Connection	2" NPT Coupling
Max Suction Lift	26 ft
Engine Brand	Honda
Engine Model	GX160
Engine Max Output	5.5 hp / 3600 rpm
Fuel Tank Capacity	0.95 gal
Run Time Per Tank	3.3 hr (continuous)
Weight	82 lbs



Blue PVC Discharge Hose, Male and Female NPSH Threaded Couplings, 2" x 50 ft and 3" x 50 ft



2" Suction Strainer, Round Hole



Green PVC Suction Hose, Male and Female NPSH Threaded Couplings, 3" x 20 ft

For Purchase or Rent



3" Engine Powered Trash Pump

#EPT3-80HA

Max Capacity	360 gpm
Max Head	96 ft
Impeller Material	High Chrome Iron Casting
Wear Plate Material	Stainless Steel
Discharge Connection	3" NPT Coupling
Suction Connection	3" NPT Coupling
Max Suction Lift	26 ft
Engine Brand	Honda
Engine Model	GX240
Engine Max Output	8.0 hp / 3600 rpm
Fuel Tank Capacity	1.6 gal
Run Time Per Tank	3.2 hr (continuous)
Weight	136 lbs



Blue PVC Discharge Hose, Male and Female NPSH Threaded Couplings, 2" x 50 ft and 3" x 50 ft



3" Suction Strainer, Round Hole



Green PVC Suction Hose, Male and Female NPSH Threaded Couplings, 3" x 20 ft

For Purchase Only



3" Engine Powered Pump

#TE3-80HA

Suction Size	3" NPT Coupling
Engine	Honda GX160
Max Output	5.5/3600
Dimension	L 20-1/2" x W 16-1/4" x H 18-1/8"
Pump Weight	64 lbs



3" Suction Strainer, Round Hole



Green PVC Suction Hose, Male and Female NPSH Threaded Couplings, 3" x 20 ft



Blue PVC Discharge Hose, Male and Female NPSH Threaded Couplings, 2" x 50 ft and 3" x 50 ft

For Rent Only



Mobile Diesel Surface Pump, 2250 GPM Max Capacity

#CPP 6-74 T4F KD

Max Capacity	2250 US gpm
Max Head	167 ft
Max Solids Handling	3"
Engine Model	Kohler KDI 2504TCR
# Engine Cylinders	4
Engine Cooling	Liquid with radiator
Engine RPM Type	Variable
Engine Standard Speed	2200 rpm
Max Engine Power	74 HP
Engine Start Type	Electric
Engine Starting Voltage	12 V
Fuel Consumption	3.5 gal/hr
Dimensions	L 150" W 76" H 72"
Weight	4,085 lbs




Blue PVC Discharge Hose, Male and Female Camlock Threaded Couplings, 6" x 50 ft



6" Suction Strainer, Round Hole



Green PVC Suction Hose, Male and Female NPSH Threaded Couplings, 3" x 20 ft

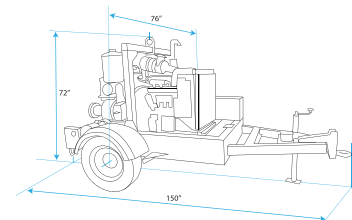

Electric Powered Pumps

For Purchase Only



F-13



2E-N



2E-38NY



Miscellaneous Pumps

Item #	Description
F-13	1/4" HP Utility Pump w/ Garden Hose Connection
2E-N	1/40HP Little Giant Submersible Pump 115V
2E-38NY	1/40HP Little Giant Submersible Pump 230V



#471-173
Garden Hose
Spray Nozzle



#SS0030
50' Garden Hose

#SS0031
100' Garden Hose

For Purchase Only



Manual Electric Submersible Pump

#HS2.4S

Motor Output	1/2HP
Phase	Single
Discharge Bore	2"
Voltage/Amp	110/5.4
Cable Length	20 FT
Dimensions	Dia.10-1/16" x H-12-15/16"
Continuous Running Water Level	3.5"
Pump Weight	30 lbs



Blue PVC Discharge Hose,
Male and Female NPSH
Threaded Couplings,
2" x 50 ft and 3" x 50 ft

For Purchase Only



2" Electric Submersible Dewatering Pump

#LB-480

Discharge Bore	2"
Max Capacity	62.4 ft
Max Head	39 ft
Max Water Temp	104° F
Motor Output	2/3 HP
Phase	Single
Cable Length	32 ft
Weight	28 lbs



Blue PVC Discharge Hose,
Male and Female NPSH
Threaded Couplings,
2" x 50 ft and 3" x 50 ft

For Purchase Only



Manual Electric Submersible Pump

#LB-800

Motor Output	1HP
Phase	Single
Discharge Bore	2"
Voltage/Amp	115/9.6
Cable Length	50 FT
Dimensions	Dia. 7-9/16" x H-13-7/16"
Continuous Running Water Level	2"
Pump Weight	35 lbs



Blue PVC Discharge Hose,
Male and Female NPSH
Threaded Couplings,
2" x 50 ft and 3" x 50 ft

For Purchase Only



3" Manual Electric Submersible Pump

#HS3-75S

Motor Output	1HP
Phase	Single
Discharge Bore	3"
Voltage/Amp	115/9.6
Cable Length	32 FT
Dimensions	Dia.12-7/16" x H-15-1/4"
Continuous Running Water Level	3.5"
Pump Weight	49 lbs



Blue PVC Discharge Hose,
Male and Female NPSH
Threaded Couplings,
2" x 50 ft and 3" x 50 ft



For Purchase Only

Pump Accessories

2" Accessories

Item #	Description
Strainer 2 in	2" Strainer
G200-G-BU	2" Cam Loc Gasket
G200-A-AL	2" Male Cam Lock X 2" FNPT
G200-D-AL	2" FNPT X 2" Female Cam Lock



#Strainer 2 in



#G200-G-BU



#G200-D-AL



#G200-A-AL

3" Accessories

Item #	Description
Strainer 3 in	3" Strainer
G300-G-BU	3" Cam Loc Gasket
G300-A-AL	3" Male Cam Lock X 3" FNPT
G300-D-AL	3" FNPT X 3" Female Cam Lock



#Strainer 3 in



#G300-G-BU



#G300-D-AL



#G300-A-AL

2" Discharge Hoses

Item #	Description
1148-2000-50-CE	2" X 50' Blue Discharge Hose w/ Cam Lock Fittings
1148-2000-50-NPSH	2" X 50' Blue Discharge Hose w/ NPT Fittings
3200-2x50CE	2" X 50' Mill Hose w/ Cam Lock Fittings



#1148-2000-50-CE



#1148-2000-50-NPSH



#3200-2x50CE

3" Discharge Hoses

Item #	Description
1148-3000-50-CE	3" X 50' Blue Discharge Hose w/ Cam Lock Fittings
1148-3000-50-NPSH	3" X 50' Blue Discharge Hose w/ NPT Fittings
3200-3x50CE	3" X 50' Mill Hose w/ Cam Lock Fittings



#1148-3000-50-CE



#1148-3000-50-NPSH



#3200-3x50CE

2" Suction Hoses

Item #	Description
SUCTION HOSE 2IN	2" X 20' Suction Hose w/ NPT Fittings
7901-2X20CN	2" x 20' Suction Hose w/ Cam Lock Fittings



#7901-2X20CN



#7901-2X20CN

3" Suction Hoses

Item #	Description
SUCTION HOSE 3IN	3" X 20' Suction Hose w/ NPT Fittings
7901-3X20CN	3" x 20' Suction Hose w/ Cam Lock Fittings



#7901-3X20CN



#7901-3X20CN



Call to Order
877.446.4352

Greater Detroit, Greater Chicago, Greater St. Louis

www.midlandtool.com
www.superiortoolrental.com

