











SPRING PRODUCT GUIDE















PRICES EFFECTIVE APRIL 1 - JUNE 30, 2023

# CLOSEOUT WHILE SUPPLIES LAST

# **SPRING SPECIAL 30% OFF**




Call to Order 877.446.4352

USA

midlandtool.com f 🖲 🖷 🖻

# CLOSEOUT WHILE SUPPLIES LAST

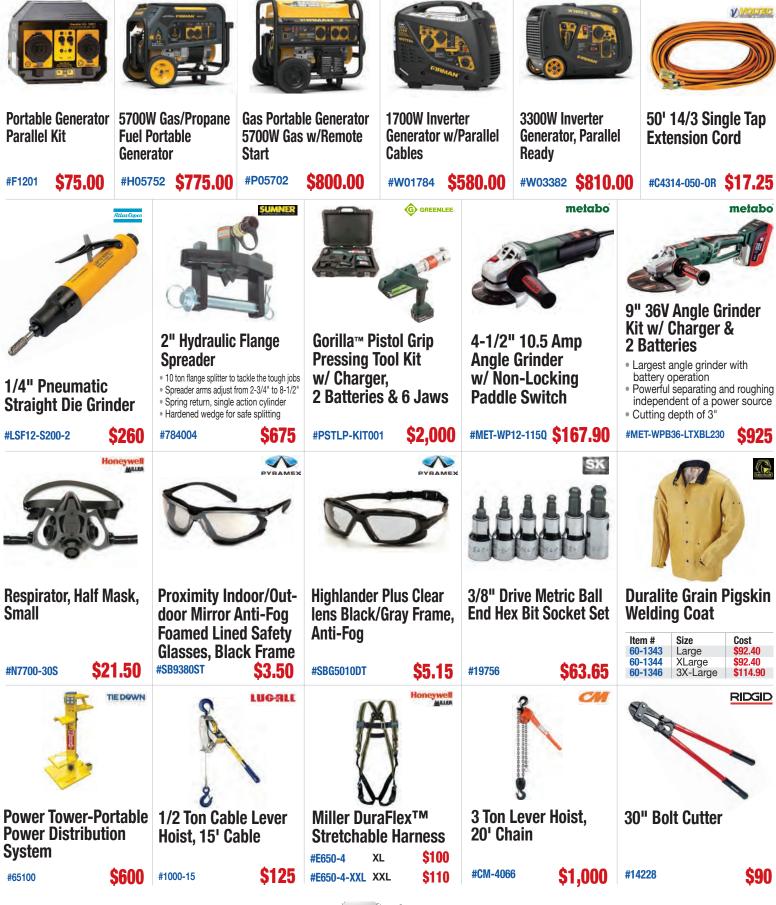

midlandtool.com 🛈 🔍 🖻

Call to Order 877.446.4352

# SAFETY

Workplace Safety Violations of FY 2022

# **FALL PROTECTION**



GUARDIAN FALL PROTECTION

## Beamer® 2000 Fall Arrest Anchor #GF-00102



### Beamer<sup>®</sup> BBC Fall Arrest Anchor #GF-00130



Halo Web SRL, 20' 30', Galvanized Steel Snap Hook #GF-10910 20 ft #GF-10915 30 ft

Halo Cable SRL-LE. 20' 30', Steel Snap Hook #GF-10920 20 ft

#GF-10925 30 ft



Fall Protection - General

Ladders Ŕ Total Violations: 2, 143 (1926.1053)

**Scaffolding** X Total Violations: 2,058 (1926.451)

Lockout/Tagout Total Violations: 1,977 (1910.147)

**PPE - Eve/Face Protection** Total Violations: 1,401 (1926.102)



ස



**Bolt Hole Anchor** 

#GF-00230

Halo Web SRL. 11' Steel Snap Hook #GF-10900







**Double Diablo** SRL-LE, 8', Steel **Snap Hook** #GF-11074

**GR6 Web SRL.** Steel, 6', Snap Hook



**Vinyl-Coated Galvanized Cable Choker Anchor**, 2-1/2" & 3" O-Ring Ends

Size
3 ft
6 ft
8 ft



# Premium Cross-Arm Straps

Item#	Length
GF-10785	3 Feet
GF-10787	6 Feet
GF-10790	10 Feet
GF-10792	15 Feet
GF-10793	20 Feet



# **Series 1 Full Body Harness**

 Chest pass-through Leg tongue buckles

0 0	
ltem#	Size
GF-37004	XS - S
GF-37005	M - L
GF-37006	XL - XXL



# **Series 3 Full Body Harness**

- Leg tongue buckles
- · Waist Pad with side-D-rings

ltem#	Size
GF-37192	XS - S
GF-37193	M - L
GF-37194	XL - XXL

# **HAZARD COMMUNICATION**

SAFETY



Call to Order 877.446.4352

USA



# BOLT<sup>IM</sup> SAFETY HELMETS & ACCESSORIES

M

midlandtool.com **£00** 





SWAPPABLE REDLITHIUM<sup>™</sup> USB 3.0 BATTERY

Powered by

#### **SUN PROTECTION**



**USB-C CHARGING** 

5 OUTPUT MODES 600 lumens of TRUEVIEW<sup>™</sup> High

**Definition Output** 

PIVOTING LIGHT HEAD MOUNTED REAR BATTERY PACK

CAM LOCK

Secure and balanced rear attachment



FACE SHIELD USE

#### BOLT™ ADAPTOR BRACKET

Compatible with MILWAUKEE<sup>®</sup> Safety Helmets and Hard Hats





# HEAD PROTECTION & CUSTOMIZATION





- INTERACTIVE Real-Time Design
- ADD YOUR LOGO Most File Types Accepted
- EASY ORDERING with No Added Fees





Safety Helmet Type 2 Unvented Class E

#48-73-1301

**AVAILABLE COLORS** 

White



Safety Helmet Type 2 Vented Class C #48-73-1310

# Milwaukee



Front Brim Type 1 Class C Hard Hat, Vented #48-73-1001

Front Brim Type 1 Class E Hard Hat, Unvented #48-73-1021



BOLT<sup>™</sup> Sunshade #48-73-1070

BOLT<sup>™</sup> Sun Visor #48-73-1073



BOLT<sup>™</sup> Clear Eye Visor #48-73-1410 BOLT<sup>™</sup> Clear Eye Visor, Dual Coat Lens #48-73-1411



**BOLT<sup>™</sup> ACCESSORIES** 

BOLT<sup>™</sup> Tinted Eye Visor #48-73-1415 BOLT<sup>™</sup> Tinted Eye Visor, Dual Coat Lens #48-73-1416



**BOLT<sup>™</sup> Marker Clip** #48-73-1086



BOLT<sup>™</sup> Headlamp Mount #48-73-1090



BOLT<sup>™</sup> Full Face Shield, Clear #48-73-1420

BOLT<sup>™</sup> Full Mesh Face Shield #48-73-1430



BOLT<sup>™</sup> Full Face Shield Mount Replacement #48-73-1448

BOLT<sup>™</sup> Eye Visor Mount Replacement #48-73-1458



BOLT™ REDLITHIUM™ USB Headlamp #2118-21



BOLT<sup>™</sup> Earmuffs

#48-73-3250

# **EYE & FACE PROTECTION**

# SAFETY

		Blade Hard F	Mount for Hat	Bulldog <sup>TT</sup> Glasses, #EHB20S	Gray	Honeywell
	Passive Weldin • Multiple mount o • 2" x 4-1/4" lift fro Item # JP-HSL2-187S JP-HSL2-2 JP-HSL2-386	ptions nt <b>Desc</b> Blade Head	et Spring Cap Mount ription Mount for Hard Hat Mount g Cap Mount	Bulldog <sup>TI</sup> Glasses, #EHF10S	M Safety Clear	Eyesaline <sup>®</sup> Emergency Eye/Face Wash, 2 Bottle Wall Station, 32 oz Bottles
Magic.	First Aid ANSI Class B	GENUINE FIRST AID	10 Person ANSI FIRST AID KIT	25 Person FIRST		SO PERSON ANSI ERST AID KIT MICHANEK MI
Disposable Lens Cleaning Station, 1,200 Tissues, 16 oz Lens Cleaner Spray #SS0102	First Aid Kit, Me ANSI Class B, 100 Person #SS0097	etal,	First Aid Kit w/ Eye Wash, Plastic, 10 Person	First Aid ANSI Cla 25 Perso #SS0100		First Aid Kit, Metal, ANSI Class A, 50 Person
Masif				ANGE		

MaxiFlex<sup>®</sup> Ultimate<sup>™</sup> Seamless Knit Nitrile Coated Gloves, ANSI A1, Grey/ Black

Item #	Size
34-874/XS	X-Small
34-874/S	Small
34-874/M	Medium
34-874/L	Large
34-874/XL	X-Large
34-874/XXL	XX-Large


**ExtraFlex Foam Nitrile Coated Cut-**Resistant Gloves, ANSI A3, Vi-His Yellow

Item #	Size
04-300HV/S	Small
04-300HV/M	Medium
04-300HV/L	Large
04-300HV/XL	X-Large
04-300HV/XXL	XX-Large



ProFlex 7041 Nitrile-Coated Cut-**Resistant Gloves, ANSI A4, Hi-Vis Lime** 

Item #	Size
ER-17813	Medium
ER-17814	Large
ER-17816	X-Large
ER-17817	XX-Large





8

# **HEAT STRESS**





# M18 FUEL TRADE-IN \$100 OFF INSTANTLY

WHEN YOU PURCHASE A QUALIFYING M18 FUEL<sup>™</sup> KIT AND TRADE-IN A PROFESSIONAL GRADE CORDLESS TOOL AND 2 BATTERIES




OFFERS VALID FEBRUARY 1, 2023 TO APRIL 30, 2023. ALL ITEMS MAY NOT BE IN STOCK. WHILE SUPPLIES LAST.





midlandtool.com

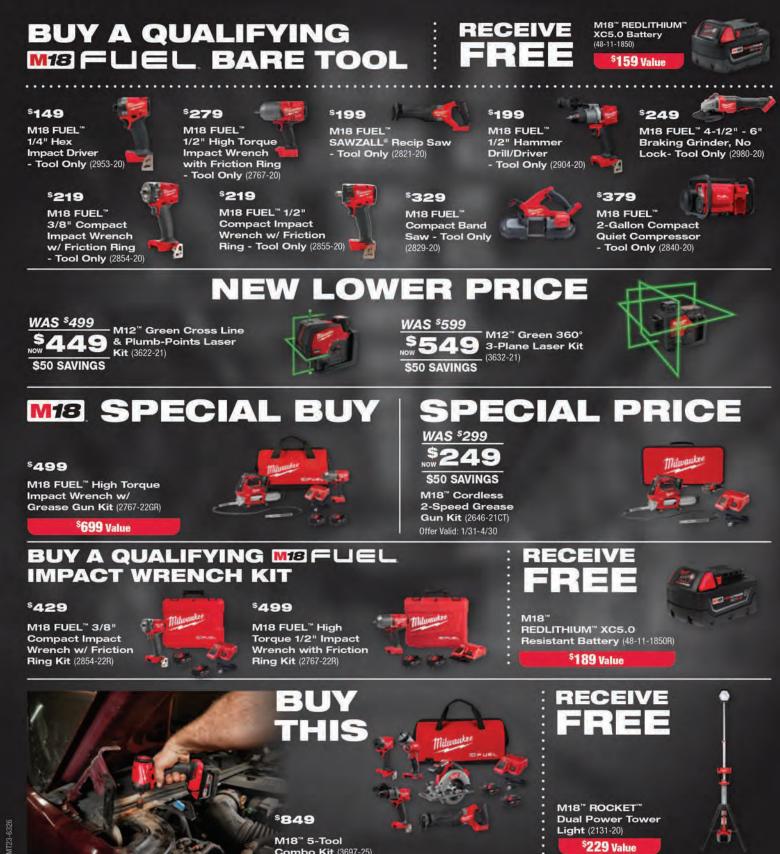

Combo Kit (3697-25)

# **PUMPS & ACCESSORIES**



# **Engine Powered Pumps**



## 2" Engine Powered Trash Pump

#### #EPT3-50HA

Max Capacity	360 gpm
Engine Brand	Honda GX160
<b>Discharge Connection</b>	2" NPT Coupling
Suction Connection	2" NPT Coupling



## **3" Engine Powered Trash Pump**

#### #EPT3-80HA

Max Capacity	360 gpm
Engine Brand	Honda GX240
Discharge Connection	3" NPT Coupling
Suction Connection	3" NPT Coupling



#### 3" Engine Powered Centrifugal Pump #TE3-80HA

Max Capacity	264 gpm
Engine Brand	Honda GX160
Max Output	5.5/3600
Suction Connection	3" NPT Coupling



Blue PVC Discharge Hose, Male and Female NPSH Threaded Couplings, 2" x 50' & 3" x 50'



2" & 3" Suction Strainer, Round Hole



Green PVC Suction Hose, Male and Female NPSH Threaded Couplings, 2" & 3" x 20'



# **PUMPS & ACCESSORIES**

# Mobile Diesel Surface Pump

#### For Rent Only





Blue PVC Discharge Hose, Male and Female Camlock Threaded Couplings, 6" x 50'

6" Suction Strainer, Round Hole

For Purchase Only

Green PVC Suction Hose, Male and Female NPSH Threaded Couplings, 6" x 20'

# 6" Mobile Diesel Surface Pump, 2250 GPM Max Capacity #CPP 6-75 T4F KD

Max Capacity	2250 US gpm
Max Solid Handling	3"
Weight	4,085 lbs
Dimenstions	L 159" W 76" H 72"

# **Pump Accessories**

## 2" & 3" Pump Accessories

Courses .	Description	Strai	ner
(and the second	Size	2"	3"
	Item #	Strainer 2 in	Strainer 3 in

B	Description	Cam Lock Gasket	
	Size	2"	3"
	Item #	G200-G-BU	G300-G-BU

Male Cam Lock X 2" FN	
2"	3"
G200-A-L	G300-A-
	2"

0			
-	Description	FNPT X 2" Fe	male Cam Lock
2	Size	2"	3"
Sec.	Item #	G200-D-AL	G300-D-AL

# Pneumatic Diaphragm Pump



Blue PVC Discharge Hose, Male and Female NPSH Threaded Couplings, 2" x 50 ft

ARO

Thermoid AIR POWER™ Jackhammer Air Hose, 3/4" x 5 ft

#### 1-1/2" Pro Series Metallic Double Pneumatic Diapragm Pump #666159-362-C

Inlet/Outlet Size	1-1/2"
Flow Rate	90 gpm
Max Suspended Solie Sizes	3/32"
Max Operating Pressure	120 psi

### 2" & 3" Discharge Hoses

ALLA	Description	50' Blue Discharge Hose	w/ Cam Lock Fittings
O MARK	Size	2" x 50'	3" x 50'
	Item #	1148-2000-50-CE	1148-3000-50-CE
( Mr.	Description	50' Blue Discharge Ho	ose w/ NPT Fittings
	Size	2" x 50'	3" x 50'
	Item #	1148-2000-50-NPSH	1148-3000-50-NPSH
130 Les	Description	50' Mill Hose w/ Ca	m Lock Fittings
Size		2" x 50'	3" x 50'
024	Item #	3200-2x50CE	3200-3x50CE

### 2" & 3" Suction Hoses

Description	20' Suction	Hoses
Size	2" x 20'	3" x 20'
Item #	<b>SUCTION HOSE 2IN</b>	SUCTION HOSE 3IN
Description	Suction	n Hoses
Size	2" x 20'	3" x 20'
Itom #	7901-2x20CN	7901-2x20CN
	Size Item # Description	Size 2" x 20' Item # SUCTION HOSE 2IN Description Suction Size 2" x 20'



#### Vinnie's Tool Talk

Spring thaw is quickly approaching. It's not a bad idea to think about your options for dewatering your jobsites. We carry pumps that discharge water from 38 to 2,250 gallons per minute. We also offer pumps for purchase or rent. And we stock a full line of accessories including discharge hoses, suction hoses, strainers, and couplings to keep your jobsites dry and your crew working. Check out the latest video on our full line of pumps and accessories.

# YouTube

USA

# LADDERS & SCAFFOLDING

SAFETY



#### Vinnie, Product Specialist

"No more OSHA fines due to missed safety ratings. The Series FXS1500's HiVis green top and shoes make them easily identifiable on the job-site. This ladder also converts from a step ladder into a shelf ladder with Louisville's patented ProTop™ tray."



## **SAFETY TIPS**

Ladders are among the top causes of **OSHA** violations.

- They're always in the **Top 10** of cost and occurrence violations.
- The average cost of an accident involving a ladder is
   \$80,000
- The OSHA average cost of a fine is \$1,500.

 OSHA believes that 100% of ladder accidents can be prevented if proper attention to the equipment and training were provided.

OUISVILLE



LOUISVILLE

Fiberglass Pinnacle Pro Platform Ladders Type 1A 300 lb Capacity

	-	
Item #	Size	Weight
FXP1704	4 ft	24 lbs
FXP1706	6 ft	31 lbs
FXP1708	8 ft	48 lbs
FXP1710	10 ft	60 lbs
FXP1712	12 ft	73 lbs



Cross Step Fiberglass Step Ladders Type 1A 300 lb Capacity

tem #	Size	Weight
FXS1504	4 ft	15 lbs
FXS1506	6 ft	21 lbs
FXS1508	8 ft	28 lbs
FXS1510	10 ft	39 lbs
FXS1512	12 ft	48 lbs

WERNER

#### Fiberglass Step Ladders Type 1A 300 lb Capacity

Item #	Size	Weight
FSL04	4 ft	14 lbs
FSL06	6 ft	20 lbs
FSL08	8 ft	26 lbs
FSL10	10 ft	38 lbs
FSL12	12 ft	46 lbs



Fiberglass Extension Ladders Type 1A 300 lb Capacity

-	-		
Item #	Total Length	Length Ea. Section	Weight
FEL16	16 ft	8 ft	31 lbs
FEL20	20 ft	10 ft	42 lbs
FEL24	24 ft	12 ft	51 lbs
FEL28	28 ft	14 ft	60 lbs
FEL32	32 ft	16 ft	67 lbs
FEL40	40 ft	20 ft	92 lbs



Semi-Truck Flat Bed Safety Ladder 375 lb Capacity

#### **#I-6900**

- USA Made
- OSHA Compliant

Fiberglass Trench/
Manhole Ladders
Type 1AA 375 lb Capacity

Item #SizeWeightFSL08-STRAIGHT8 ft17.5 lbsFSL10-STRAIGHT10 ft21 lbs



Fiberglass Straight Ladders w/ Safety Shoes Type 1A 300 lb Capacity Item # Size Wgt.

 Item #
 Size
 Wgt.

 FE3108-STRAIGHT
 8 ft
 16 lbs

 FE3110-STRAIGHT
 10 ft
 21 lbs

 FE3112-STRAIGHT
 12 ft
 25 lbs

Call to Order 877.446.4352



Fiberglass Work Stand Type 1A 300 lb Capacity

 Item #
 Size

 TW6203
 3 ft

USA



#### PJ-Unit Stackable Scaffolding 1,000 lb Cap.

Item #	Size
0127-006-0	6 ft
0127-008-0	8 ft





# **ELECTRIC LIGHT TOWERS**



#### LIGHT TOWERS DIESEL

### 160 Watt x 4 Lamp Electric Light Towers

• Latest LED light technology • Red Rock PE canopy • Easily to transport due to compact size

SPECIFICATIONS	
Item #	CPLT E3 LED
Light Coverage	32,300 ft <sup>2</sup> (10 lux average)
Flood Lights	4 high efficiency LED flood lights
Flood Light Wattage	160 W x 4 lights
Mast Type	Vertical, manual, non-rotating, 4 stabilizers, 51 mph max wind speed,
Mast Type	23 ft max height
Enclosure	Red Rock PE canopy
Frame Specs	Spillage free frame
Power Source	Electric, powered by CPPG Generator and mains. Can daisy chain
	3 units together.
Transportability	(32 units per truck), forklift pockets, lifting eye, wheels and handle kit
Rated Frequency	60 Hz
Rated Voltage	120 VAC
<b>Dimensions / Weight</b>	48" L x 32" W x 84" H (23 ft with mast fully extended) / 551 lbs

#### <u>л і</u> **D**: . .

	320 Watt x 4 Lamp Diesel Light Towers				
AT 1	SPECIFICATIONS				
80	Item #	NLPROV-K1005C			
N~	Engine Brand / Model	Kubota / D1105			
1	Engine Prime Power (kW)**	7			
X .	Fuel Capacity	47 gal			
D	Light Type-LED	(4) Two LED, 5000° K color temperature			
	LED Wattage (per lamp)	320			
S	LED Lumens (per lamp / total)	38,500 / 154,000			
	Operating Time	155.2 hrs.			
	Outlets	Standard 20 A 120 VAC duplex GFCI / 30 A 240 VAC 4-Wire			
	Outlets	Twist Lock (NEMA L14-30R) / 30 A 120 VAC RV (NEMA TT-30R)			
Amand	Dimensions / Weight	L x 120.3" W x 100.6" H (26.6 ft with mast fully extended) / 2,200 lbs			
<					

**Reversable Coupler** Adjustable height 2" ball / 3" pintle

hmand

EPROL





֍



କ

#### CPG 25 Mobile Diesel Generator w/ Trailer, 25 KVA

#### Item # CPG 25 T4F

- Rated Frequency: 60 Hz
  Rated Prime Power (PRP) 3ø:
- Rated Prime Power (PRP) 3ø: 20 kW / 25 kVA
   Rated Standby Power
- (ESP) 3ø: 22 kW / 28 kVA
- Fuel Capacity: 72.5 gal
- Fuel Cons. at Full Load: 1.63 gal/hr
- US EPA Tier 4 Final

#### Vinnie, Product Specialist

"Need more run time? Our CP Diesel Generators offer an external fuel hookup, giving you the ability to run your generator for as long you need!"



### 250 CFM Mobile Diesel Air Compressor

#### Item # CPS 250

- Normal Effective Working Pressure: 100 – 125 – 150 psig
- Max Unloaded Pressure: 125 psig
- Min. Working Pressure: 58 psig
  Fuel Capacity: 23 gal
- Fuel Capacity: 23 gai
- Fuel Consumption: 3.43 gal/hr
- Engine Emissions Level: Tier 4 Final



#### CPG 45 Mobile Diesel Generator w/ Trailer, 45 KVA

#### Item # CPG 45 T4F

- Rated Frequency: 60 Hz
- Rated Prime Power (PRP) 3ø: 36 kW / 45 kVA
- Rated Standby Power (ESP) 3ø: 40 kW / 50 kVA
- Fuel Capacity: 72.5 gal
- Fuel Cons. at Full Load: 2.76 gal/hr

110 CFM Mobile Diesel

Free Air Delivery @ Effective

Working Pressure: 110 cfm

Normal Effective Working Pressure:

· Max Unloaded Pressure: 115 psig

• Engine Emissions Level: Tier 4 Final

· Min. Working Pressure: 58 psig

Fuel Capacity: 7.5 gal
Fuel Consumption: 1.3 gal/hr

Air Compressor

Item # CPS 110

100 psig

E STAR (G) E STA

US EPA Tier 4 Final



#### CPG 70 Mobile Diesel Generator w/ Trailer, 70 KVA

#### Item # CPG 70 T4F

- · Rated Frequency: 60 Hz
- Rated Prime Power (PRP) 3ø: 56 kW / 70 kVA
- Rated Standby Power (ESP) 3ø: 60 kW / 75 kVA
- Fuel Capacity: 110 gal
- · Fuel Cons. at Full Load: 3.95 gal/hr
- US EPA Tier 4 Final



# 185 CFM Mobile Diesel Air Compressor

Item # CPS 185

- Free Air Delivery @ Effective Working Pressure: 185 cfm
   Normal Effective Working Pressure:
- 100 psig
- Max Unloaded Pressure: 125 psig
- Min. Working Pressure: 58 psig
- Fuel Capacity: 20 gal
- Fuel Consumption: 2.5 gal/hr
- Engine Emissions Level: Tier 4 Final



ଭ

#### 125KVA Mobile Diesel Generator w/ Trailer, 125 KVA

#### Item # 125KVA

- Rated Frequency: 60 Hz
- Rated Prime Power (PRP) 3ø: 100 kW / 125 kVA
- Rated Standby Power (ESP) 3ø: 110 kW / 138 kVA
- Fuel Capacity: 166 gal
- Fuel Cons. at Full Load: 7.06 gal/hr
- US EPA Tier 4 Final



# 185 CFM Mobile Diesel Air Compressor

#### Item # D185PKR

- Free Air Delivery @ Effective Working Pressure: 185 cfm
- Normal Effective Working Pressure: 70-125 psig
- Max Unloaded Pressure: 125 psig
- Min. Working Pressure: 70 psig
- Fuel Capacity: 30 gal
- Fuel Consumption: 2.3 gal/hr
- Engine Emissions Level: Tier 4 Final



# 400 CFM Mobile Diesel Air Compressor

### • Free Air Delivery @ Effective

- Working Pressure: 440/400 cfm • Normal Effective Working Pressure:
- 100/150 psig • Max Unloaded Pressure: 175 psig
- Max Onloaded Pressure: 175 ps
   Min. Working Pressure: 58 psig
- Fuel Capacity: 52 gal
- Fuel Capacity: 52 gai
- Fuel Consumption: 6.5/7.3 gal/hr
  Engine Emissions Level: Tier 4 Final
- Engine Emissions Level. Hel 4 Filla

Call to Order 877.446.4352

For more



# PRODUCT



## **MIG FEEDER**



### POWER MIG® 256, MIG, Flux-Cored

The POWER MIG® 256 sets the standard for MIG and Flux-Cored welding in light industrial job shop fabrication, maintenance or repair work.

SPECIFICATIONS	
Item #	K3068-2
Processes	MIG, Flux-Cored
Input Power	230/460/575/1/160
Rated Output Current/Voltage/Duty Cycle	250/26V/40%
Input Current @ Rated Output	50/24/19A
Output Range	30-300 Amps 50-700 ipm WFS (1.3-17.7 m/min) Max. OCV: 40V
Dimensions / Weight	H 31.8 x W 18.9 x D 38.8 / 220 lbs

### **INVERTER WELDER**



### Dynasty® 300 Series TIG/Stick Welding Power Source

_ <i>0</i> =												
SPEC	IFICATIO	ONS										
Item			951937									
Mate	rial Thic	kness	Aluminum Steel 0.00			8/8"						
Welda	able Me	tals	Aluminum	i, Spe	cialty	' Met	als, S	Stainle	ess S	Stee	l, Steel	
Input	Hz		50/60 Hz									
Curre	ent Type		AC / DC									
Dime	nsions /	Weight	<b>W</b> 8.5" <b>H</b>	34.75	5" <b>L</b> 3	9.5"	/ 1	47 lb:	S			
WELD	SPECIF	ICATIONS										
Welding	Input	Welding	Rated Output @	Amp	s Input	at Ra	ted Ou	tput, 5	0/60 H	lz	Max. Open	Dim./Wt.
Mode	Power	Amp. Range	60% Duty Cycle	208 V	230 V	400 V	460 V	600 V	KVA	KW	Circuit Voltage	DIII./ WU.
TIG	3-Phase	2–300 A (AC) 1–300 A (DC)	250 A at 20 V	19	17	10	8	7	7.5	6.6		H 13.88"
(GTAW)	1-Phase	2–300 A (AC) 1–300 A (DC)	250 A at 20 V	33	30	17	15	11	6.7	6.7	60 VDC**	W 8.5" D 21.88"
Stick	3-Phase	5–300 A	250 A at 30 V	*	*	14	12	9	9.8	9.1		55 lbs
(SMAW)	1-Phase	5–300 A	200 A at 27.2 V	35	32	*	*	*	9.3	9.2		
* Refer to o	wner's manua	al for complete ratings	. ** Sense voltage for	low OCI	/ stick ar	nd Lift-A	Arc™ TIC	3				

\* Refer to owner's manual for complete ratings. \*\* Sense voltage for low OCV stick and Lift-Arc™ TIG **IP23** rating – This equipment is designed for outdoor use. It may be stored, but is not intended to be used outside during precipitation unless sheltered. Operating temperature range is 14 to 104°F (-10 to 40°C). Storage temperature range is -22 to 149°F (-30 to 65°C). Portions of the preceding text are contained in

EN 60974-1: "Welding power sources for arc welding equipment."

## **MILLER ENGINE-DRIVE**



### Blue Star® 185 Gas Engine-Driven Welder/AC Generator

() <del></del>	7
	STICK

ODE	<b>OUTIO</b>		
SPE		7.1	INIS

Item #	907664
Welding Mode	CC/DC
Processes	DC stick/TIG
Amperage Range	60–195 A
Rated Weld Output at 104°F	185 A at 25 V, 20% duty cycle, 150A at 25V, 100% duty cycle
Single-Phase Generator Power	Peak: 6,500 watts, Continuous: 6,200 watts, 120/240 VAC, 40/26 A2
Dimensions / Weight	H 24.75" W 20.625" D 31.25" / 296 lbs

ENGINE SPECIFICATIONS	
Engine	Kohler CH440
Horsepower HP	13.4 hp at 3,600 rpm
Fuel Capacity	6.25 gal.
Oil Capacity	1.4 qt



//// Miller.

Superiortoolrental.com 🖲 🕬 🕬





Midland Tool & Supply and Superior Tool Rental & Repair work together to provide high quality products, rentals, equipment repair and several unique services to jobsites across the nation. Our companies are headquartered in Oak Park, Michigan (Greater Detroit), with a branch office in Calumet City, Illinois (Greater Chicago) and Madison, Illinois (Greater St. Louis). Each of our locations have meeting space for important conversations with customers and vendors, a dedicated fleet of delivery vehicles, and warehouse space to keep over 10,000 products and rentals in immediate supply.





Over 10,000 Products & Rentals



Onsite Bolting Services



Industrial Tool & Equipment Rental



Product & Rental Demo Trailers



Delivery Via Private Fleet or FedEx



Onsite Weld Testing Facilities



24/7 – 365 Emergency Service & Delivery



Customer Repair & Warranty Service Center



*StockUp*™ Onsite Supply



Calibration, Testing & Certification






USA







# PRODUCTS

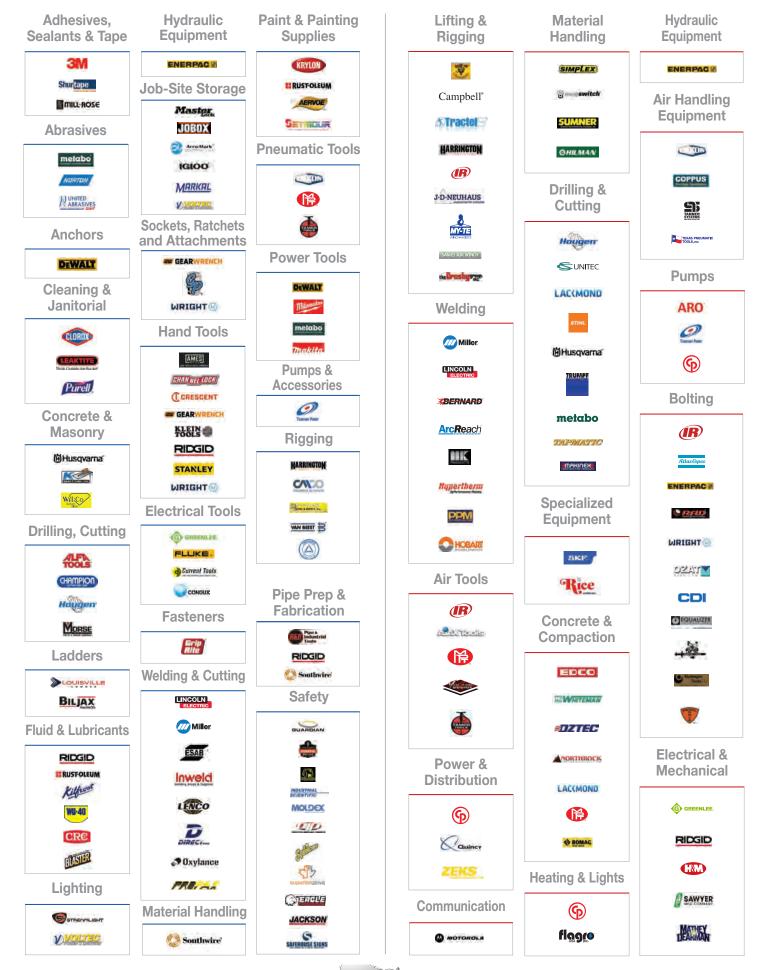

RENTALS

# STOCKUP ONSITE SUPPLY PROGRAM

**TOOL RENTAL & REPAIR** 

015

UP

0

superiortoolrental.com

Our StockUp<sup>™</sup> Program is designed to be an extension of our warehouse to stock customized inventory at your location. Check out our website and YouTube video to learn more:



Website



7

Midla

ONSITE

SUPPLY PROGRAM

midlandtool.com



1001

\_\_\_\_

YouTube

