


DIABLO CABLE SRL-LE

SELF-RETRACTING LIFELINE

FEATURES & BENEFITS

- ANSI Z359.14 Class A unit (for Non-LE applications)
- Specifically designed for Leading Edge (LE) applications
- Quick-bracket installs easily under webbing leaving D-ring free
- Lightweight composite housing
- Rubber stopper increases interior spring life
- Dual leg unit allows for 100% tie-off
- Shock absorber design acts as cushion between the housing & the worker to increase comfort.
- Multiple hook configurations available
- Personal, non-repairable SRL

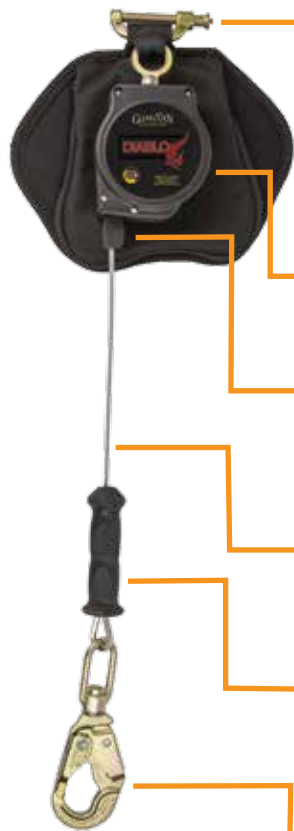

SHOWN:
PART #11070

QUICK BRACKET

Installs easily under webbing

PROTECTED SHOCK PACK COVER

LIGHTWEIGHT COMPOSITE HOUSING

RUBBER STOPPER

Increases interior spring life

CABLE LIFELINE

Resists cuts and abrasions

RUBBER GRIP

Pull out snap hook using this convenient grip

SNAP HOOK

Several different types available (see next page)



SHOWN:
PART #11074

SPECIFICATIONS

STANDARDS:

OSHA 1926 Subpart M & 1910
ANSI Z359.14-14 & A10.32-12

MATERIALS:

3/16" Galv Cable, Polyester,
Aluminum, & Stainless Steel

WORKER CAPACITY:

- Capacity range for LE: 130 - 310 lbs.
- Capacity range for Non-LE: 130 - 420 lbs.

PERFORMANCE:

- Average Arrest Force: 1,350 lbs.
- Maximum Arrest Force: 1,800 lbs.
- Maximum Deceleration Distance (for non-LE applications): 24"

NOTES:

- Maximum one user per SRL
- Always maintain 100% tie-off
- Maximum 5' free fall (for LE applications only)
- Class A SRL (for Non-LE applications only)
- LE Use Clearance Requirement: 13'-17'
- Non-LE Use Clearance Requirement: 5.5'
- Rated for use over 0.005" radius sharp edge

PART #	DESCRIPTION	WEIGHT	LENGTH
11070	Diablo Cable SRL-LE w/ Steel Swivel Snap Hook	5.27 Lbs	8'
11071	Diablo Cable SRL-LE w/ Aluminum Snap Hook	4.80 Lbs	8'
11072	Diablo Cable SRL-LE w/Steel Rebar Hook	5.80 Lbs	8'
11073	Diablo Cable SRL-LE w/ Aluminum Rebar Hook	5.41 Lbs	8'
11074	Double Diablo Cable SRL-LE w/ Steel Swivel Snap Hook	8.59 Lbs	8'
11075	Double Diablo Cable SRL-LE w/ Aluminum Snap Hook	8.13 Lbs	8'
11076	Double Diablo Cable SRL-LE w/ Steel Rebar Hook	9.12 Lbs	8'
11077	Double Diablo Cable SRL-LE w/ Aluminum Rebar Hook	8.73 Lbs	8'

APPLICATIONS



PERSONAL FALL ARREST:

Diablo Cable SRL-LEs may be used in Personal Fall Arrest applications to support:

- Maximum 1 Personal Fall Arrest System (PFAS). Structure must withstand loads applied in the directions permitted by the system of at least 5,000 lbs.
- Maximum permitted free fall is 5' for LE applications and 2' for non-LE applications.
- Applicable D-rings: Dorsal



RESTRAINT:

Diablo Cable SRL-LEs may be used in Restraint applications. Restraint systems:

- Prevent workers from reaching the leading edge of a fall hazard.
- Always account for fully deployed length of SRL. Structure must withstand loads applied in the directions permitted by the system of at least 1,000 lbs.
- No free fall is permitted.
- May only be used on surfaces with slopes up to 4/12 (vertical/horizontal).
- Applicable D-rings: Dorsal, Chest, Side, Shoulder.



NEED MORE INFORMATION?

P: 1.800.466.6385 | VISIT OUR WEBSITE: GUARDIANFALL.COM