



# SHACKLES

## Alloy Bow Shackles with Safety Bolt

- Hot Dipped Galvanized

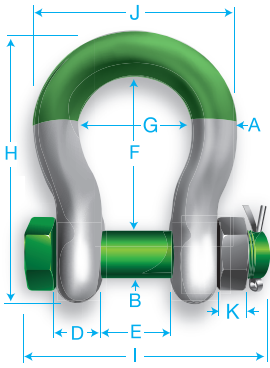

VAN BEEST 

### SPECIFICATIONS

Working Load Limit (tons)	Dimensions (in)											Weight Each (lbs)
	Diameter Bow	Diameter Pin	Diameter Eye	Width Eye	Width Inside	Length Inside	Width Bow	Length	Length Bolt	Width	Thickness Nut	
	A	B	C	D	E	F	G	H	I	J	K	
3.3	1/2	5/8	1-11/32	1/2	7/8	2	1-1/4	3-1/2	3-7/32	2-9/32	1/2	0.97
5	5/8	3/4	1-9/16	5/8	1-1/16	2-17/32	1-11/16	4-11/32	3-27/32	2-15/16	21/32	1.74
7	3/4	7/8	1-13/16	3/4	1-7/32	3	2	5-3/32	4-1/2	3-1/2	3/4	2.78
9.5	7/8	1	2-1/16	7/8	1-13/32	3-9/32	2-9/32	5-21/32	5-1/8	4-1/32	7/8	4.14
12.5	1	1-1/8	2-5/16	31/32	1-11/16	3-3/4	2-11/16	6-15/32	5-29/32	4-21/32	31/32	6.13
15	1-1/8	1-1/4	2-19/32	1-3/32	1-27/32	4-1/4	2-15/16	7-9/32	6-17/32	5-5/32	1-1/16	8.53
18	1-1/4	1-3/8	2-27/32	1-1/4	2	4-17/32	3-9/32	7-29/32	7	5-25/32	1-3/16	11.6
21	1-3/8	1-1/2	3-5/32	1-3/8	2-1/4	5-1/4	3-5/8	8-15/16	7-3/4	6-3/8	1-5/16	15.3
30	1-1/2	1-5/8	3-15/32	1-1/2	2-3/8	5-3/4	3-29/32	9-13/16	7-15/16	6-7/8	3/4	19.38
40	1-3/4	2	4-1/16	1-25/32	2-29/32	7	4-31/32	11-13/16	9-13/16	8-1/2	29/32	33.07
55	2	2-1/4	4-19/32	2-1/4	3-9/32	7-3/4	5-7/16	13-7/16	11-1/4	9-29/32	1-1/32	48.50
85	2-1/2	2-3/4	5-5/8	2-3/4	4-1/8	10-1/4	7-3/32	17-7/32	13-17/32	12-19/32	1-1/4	92.59
120	3	3-1/4	6-3/8	3-9/32	5	12-15/16	7-15/32	21-1/16	15-7/8	14-1/32	1-9/16	154.32
150*	3-3/4	3-3/4	8-3/16	3-19/32	5-25/32	15-3/4	9-3/8	25-15/32	20-1/8	16-27/32	1-31/32	246.92
175*	4	4-1/4	9-3/8	4-1/32	6-21/32	16-5/32	10-13/16	27-3/32	22-3/32	19-3/32	2-3/8	352.74

\* round headed bolt

